


K72 Four Jaw Independent Chuck

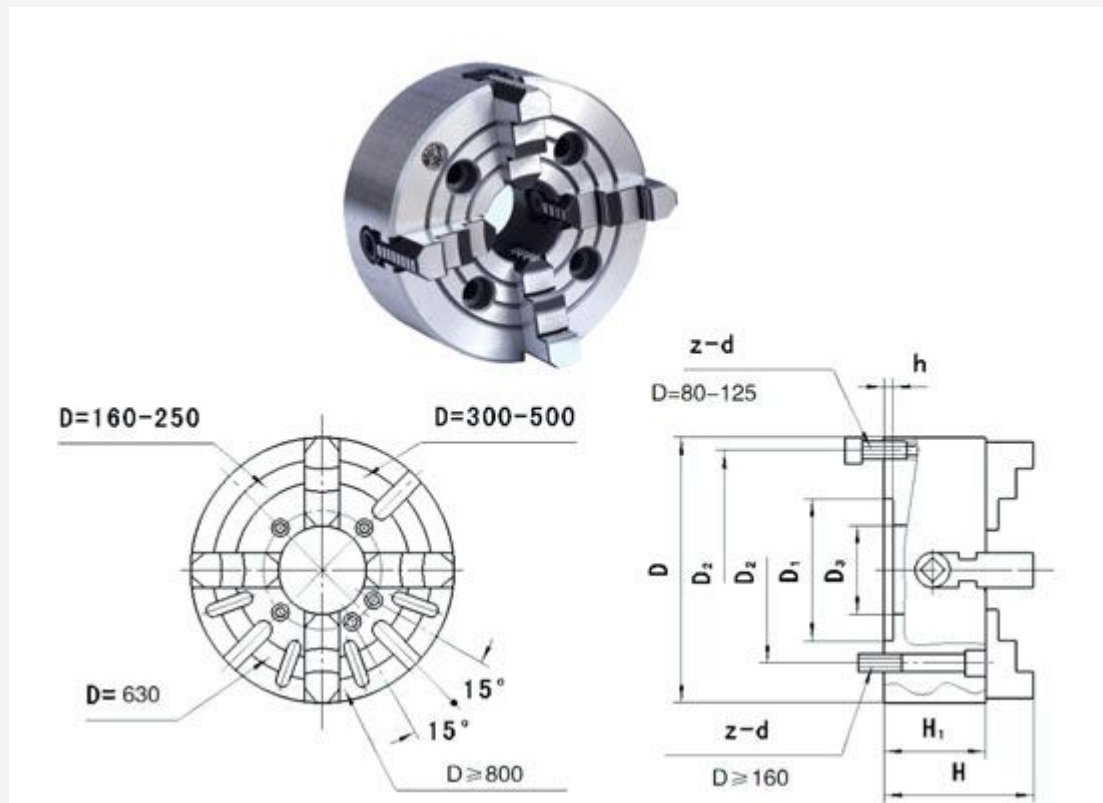

Features of K72 Four Jaw Independent Chuck

1. Short cylindrical center mounting;
2. Independent and adjustable, suitable for machining all kinds of special shape workpiece;
3. General chuck is provided with one-piece jaw including one set of internal jaw and external jaw;
4. Optional A, D, E type chuck is provided with two-piece jaw, which can perform either internal or external jaws through adjustment and conform to ISO3442 standard;

Parameters of K72 Four Jaw Independent Chuck

Model	D	D1	D2	D3	H	H1	h	z-d	Max input torque (Nm)	Max speed (rpm)	Net weight (kg)
K72 50	50	15		M14x1	54	40	4				
K72 80	80	55	66	22	56	42	3.5	4-M6	25	4000	
K72 100	100	72	84	25	54	74	3.5	4-M8	30	3500	3
K72 125	125	95	108	30	78	56	4.5	4-M8	50	3000	5

K72 160	160	65	95	45	93	65	5	4-M10	70	2500	9
K72 200	200	80	112	56	107	75	6	4-M10	100	2000	15
K72 250	250	110	130	75	120	80	6	4-M12	150	1600	23
K72 300	300	152	130	75	134	90	6	4-M12	180	1200	39
K72 320	320	140	165	95	134	90	6	4-M16	200	1200	40
K72 350	350	130	168	95	134	90	6	4-M16	250	1200	53
K72 400	400	160	185	125	143	95	8	4-M16	280	1000	55
K72 450	450	180	205	140	147	100	8	4-M16	300	900	71
K72 500	500	200	236	160	161	106	8	4-M20	350	800	102
K72 630	630	220	258	180	180	118	10	4-M20	400	600	159
K72 800	800	250	300	210	202	132	12	8-M20	500	500	255
K72 1000	1000	320	370	260	230	150	15	8-M20	600	400	418
K72 1250	1250	400	500	305	256	165	15	8-M20	700	300	
K72 1400	1400	400	500	305	246	155	15	8-M20	800	260	
K72 1600	1600	420	520	320	266	175	20	8-M24	900	200	
K72 2000	2000	450	560	350	290	190	20	8-M30	1000	150	