



JSG-69L

Disc & Belt Sander

JR130 1 ~230V 50Hz


PARTS LIST



Импортер в РФ: ООО «ИТА Технолоджи»
105082, Москва, Переведеновский пер., д. 17
www.jettools.ru
Made in PRC / Сделано в КНР

P-JR130 2026-07

Parts Breakdown for JSG-69L Disc & Belt Sander

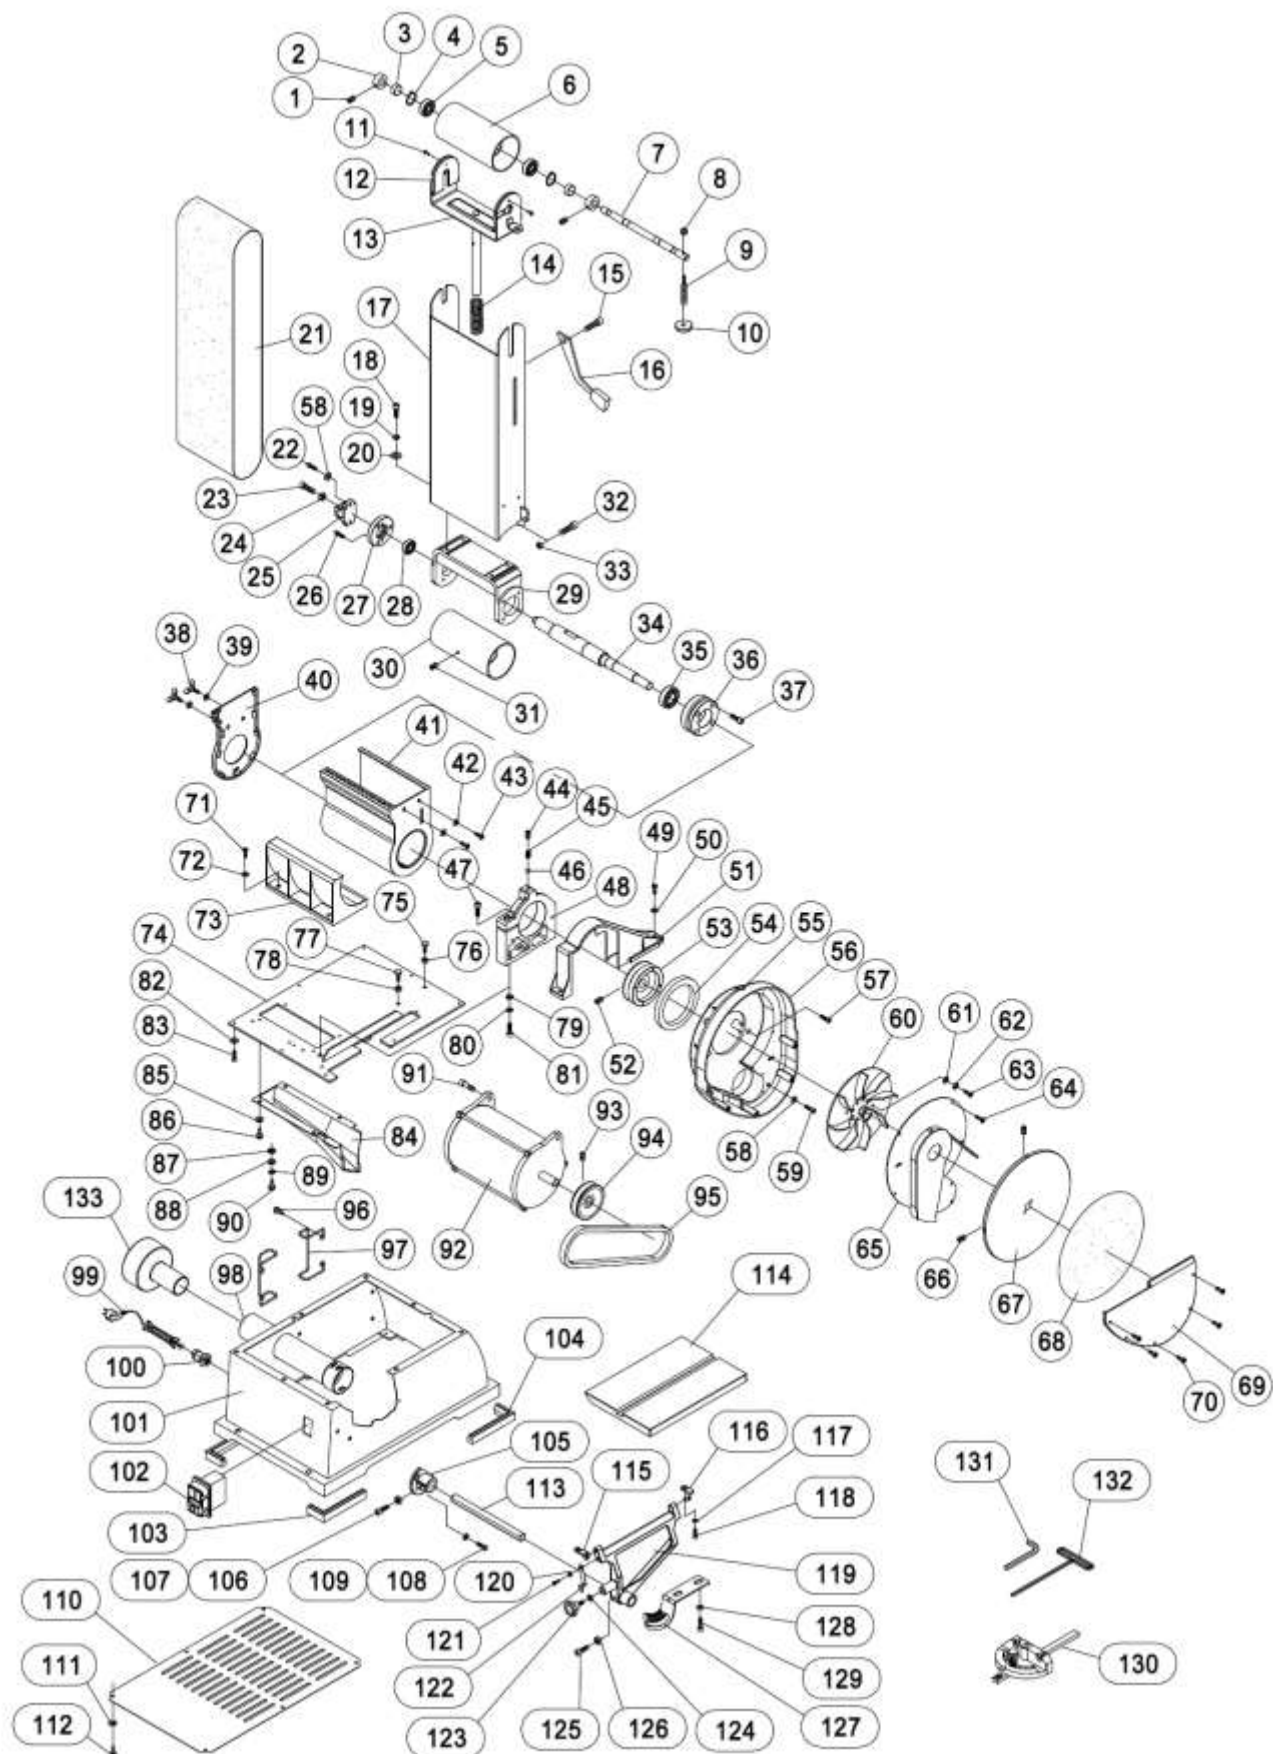

Parts List for JSG-69L Disc & Belt Sander

Index No.	Part No.	Description	Size	Qty
1	GB79	Socket Set Screw	M5x6	2
2	JSG69L-002	Bushing		2
3	JSG69L-003	Rubber Bushing		2
4	JSG69L-004	Retaining Ring	12mm	2
5	GB/T276	Ball Bearing	6201-2RS	2
6	JSG69L-006	Idler Drum		1
7	JSG69L-007	Idler Drum Shaft		1
8	GB41	Lock Nut	M6	1
9	JSG69L-009	Screw		1
10	JSG69L-010	Tracking Adjusting Nut		1
11	JSG69L-011	Thread Forming Screw	ST3.5x10	2
12	JSG69L-012	Idler Drum Bracket Insert		2
13	JSG69L-013	Idler Drum Bracket		1
14	JSG69L-014	Spring		1
15	JSG69L-015	Hex Head Bolt		1
16	JSG69L-016	Belt Tension Lever		1
17	JSG69L-017	Platen		1
18	GB70.1	Socket Head Cap Screw	M6x12	4
19	GB93	Lock Washer	6mm	4
20	GB95	Flat Washer	6mm	4
21	JSG69L-021	Abrasive Belt		1
22	GB70.1	Socket Head Cap Screw	M5x16	2
23	GB70.1	Socket Head Cap Screw	M8x20	1
24	GB41	Hex Nut	M8	1
25	JSG69L-025	Table Support Bracket		1
26	GB70.1	Socket Head Cap Screw	M6x12	3
27	JSG69L-027	Bearing House		1
28	GB/T276	Ball Bearing	6001-2RS	1
29	JSG69L-029	Platen Support Bracket		1
30	JSG69L-030	Drive Drum		1
31	GB79	Socket Set Screw	M8x10	4
32	GB70.1	Socket Head Cap Screw	M6x25	1
33	GB41	Hex Nut	M6	1
34	JSG69L-034	Drive Shaft		1
35	GB276	Ball Bearing	6004-2RS	1
36	JSG69L-036	Pivot		1
37	GB70.1	Socket Head Cap Screw	M6x30	4
38	JSG69L-038	Wing Screw	M5x10	2
39	GB95	Flat Washer	5mm	2
40	JSG69L-040	Dust Cover		1
41	JSG69L-041	Dust Shroud		1
42	GB/T95	Flat Washer	5mm	2
43	GB818	Pan Head Cap Screw	M5x10	2
44	GB79	Socket Set Screw	M10x12	1
45	JSG69L-045	Spring		1
46	JSG69L-046	Steel Ball	8mm	1
47	GB70.1	Socket Head Cap Screw	M8x30	1
48	JSG69L-048	Support Plate		1
49	GB818	Pan Head Cap Screw	M6x16	2
50	GB95	Flat Washer	6mm	2
51	JSG69L-051	Belt Cover		1
52	GB79	Socket Set Screw	M8x8	2
53	JSG69L-053	Spindle Pulley		1
54	JSG69L-054	Seal		1

Parts List for JSG-69L Disc & Belt Sander

Index No.	Part No.	Description	Size	Q'ty
55	JSG69L-055	Guard Insert		1
56	JSG69L-056	Disc Guard		1
57	GB70.1	Socket Head Cap Screw	M5x30	2
58	GB95	Flat Washer	5mm	2
59	GB70.1	Socket Head Cap Screw	M5x10	1
60	JSG69L-060	Fan		1
61	GB95	Flat Washer	5mm	4
62	GB93	Lock Washer	5mm	4
63	GB70.1	Socket Head Cap Screw	M5x12	4
64	JSG69L-064	Thread Forming Screw	ST3.5x13	8
65	GB95	Fan Cover		1
66	GB79	Socket Set Screw	M8x8	2
67	JSG69L-067	Aluminum Disc		1
68	JSG69L-068	Abrasive Disc		1
69	JSG69L-069	Dust Cover		1
70	GB818	Pan Head Cap Screw	M5x12	5
71	GB818	Pan Head Cap Screw	M6x10	2
72	GB95	Flat Washer	6mm	2
73	JSG69L-073	Dust Deflector		1
74	JSG69L-074	Support Plate		1
75	GB5781	Hex Cap Screw	M8x40	1
76	GB6170	Hex Nut	M8	1
77	GB5781	Hex Cap Screw	M8x35	1
78	GB41	Hex Nut	M8	1
79	GB95	Flat Washer	8mm	3
80	GB93	Lock Washer	8mm	3
81	GB70.1	Socket Head Cap Screw	M8x16	3
82	GB95	Flat Washer	5mm	8
83	GB70.1	Socket Head Cap Screw	M5x6	8
84	JSG69L-84	Dust Chute		1
85	GB95	Flat Washer	5mm	4
86	GB818	Pan Head Cap Screw	M5x6	4
87	JSG69L-087	Serrate Washer	5mm	2
88	GB85	Flat Washer	5mm	2
89	GB93	Lock Washer	5mm	2
90	GB818	Pan Head Cap Screw	M5x10	2
91	JSG69L-091	Screw		2
92	JSG69L-092	Motor		1
93	GB79	Socket Set Screw	M8x8	2
94	JSG69L-094	Motor Pulley		1
95	JSG69L-095	V-Belt		1
96	GB818	Pan Head Cap Screw	M5x10	4
97	JSG69L-097	Line Cord Hook		2
98	JSG69L-098	Dust Port	Ø50.80	1
99	JSG69L-099	Line Cord		1
100	JSG69L-100	Strain Relief		1
101	JSG69L-101	Body		1
102	JSG69L-102	Switch	230V	1
103	JSG69L-103	Foot A		2
104	JSG69L-104	Foot B		2
105	JSG69L-105	Table Support Bracket		1
106	GB70.1	Socket Head Cap Screw	M8x20	1
107	GB41	Hex Nut	M8	1
108	GB95	Flat Washer	6mm	2
109	GB70.1	Socket Head Cap Screw	M6x16	2

Parts List for JSG-69L Disc & Belt Sander

Index No.	Part No.	Description	Size	Q'ty
110	JSG69L-110	Lower Cover		1
111	GB95	Flat Washer	5mm	6
112	GB818	Pan Head Cap Screw	M5x10	6
113	JSG69L-113	Table Support Rod		1
114	JSG69L-114	Table		1
115	JSG69L-115	Mount Pin A		1
116	JSG69L-116	Mount Pin B		1
117	JSG69L-117	Flat Washer		2
118	GB70.1	Socket Head Cap Screw	M5x10	2
119	JSG69L-119	Table Support		1
120	GB95	Flat Washer	5mm	1
121	GB818	Pan Head Cap Screw	M5x10	1
122	JSG69L-122	Pointer		1
123	JSG69L-123	Knob		1
124	GB95	Flat Washer	6mm	1
125	GB70.1	Socket Head Cap Screw	M8x20	1
126	GB41	Hex Nut	M8	1
127	JSG69L-127	Angle Scale Plate		1
128	GB95	Flat Washer	8mm	2
129	GB70.1	Socket Head Cap Screw	M8x10	2
130	JSG69L-130	Miter Gauge		1
131	JSG69L-131	6mm Hex Wrench	6mm	1
132	JSG69L-132	4mm Hex Wrench	4mm	1
133	JSG69L-133	Dust Port Adapter	Ø50.8 to Ø100	1
	JSG69L-WL	JET Warning Label (Not shown)		1
	JSG69L-ID	JET ID Label (Not shown)		1
	JSG69L-ML	JET Motor Label (Not shown)		1
	JET-LOGO	JET Logo with Adhesive (Not shown)		1
	JET Model Logo	JET Model Logo with Adhesive		1

Wiring Diagram for JSG-69L Disc & Belt Sander

	colour of strands	Litzenfarben	couleur des cordons
BK	black	schwarz	noir
WH	white	weiß	blanc
BU	blue	blau	bleu
YE	yellow	gelb	jaune
RD	red	rot	rouge
BN	brown	braun	brun
GY	grey	grau	gris
GNYE	green-yellow	grün-gelb	vert-jaune
OG	orange	orange	orange
VT	violet	violett	violet

	meaning of symbol	Bedeutung der Zeichen	interprétation
M	motor	Motor	moteur
S	switch	Schalter	interrupteur
C	condenser	Kondensator	condensateur
E	electronic unit	Elektronik Einheit	unité électronique
F	fuse	Sicherung	fusible
RS	reversing switch	Drehrichtungsschalter	commu. droite/gauche
CS	centrifugal switch	Fliehkraftschalter	déclencheur centrifuge
OL	overload cut-off	Überlastschuttschalter	déclencheur surcharge
L	machine lamp	Maschinenleuchte	lampe
LS	limit switch	Positionsendschalter	micro

JR130..... ~ 230V, 50Hz

